


DATA SHEET

| | | | |
|---------------|----------------|------|-------|
| UM MODEL NO.: | SPECIFICATIONS | REV. | |
| UT90131C | TRANSFORMERS | A3 | 00/03 |


ELECTRICAL SPECIFICATIONS AT 25°C :

1. TURNS RATIO : 5:20:20 ±2%, AT 15.75KHz 1V, P(4-9):(16-17):(20-21)
8:12 ±2%, AT 15.75KHz 1V, P(2-3):(22-23)
8:12 ±2%, AT 15.75KHz 1V, P(10-11):(14-15)
2. INDUCTANCE : 26uH±30% , AT 100KHz 100mV, P(4-9)
55uH Min., AT 100KHz 100mV, P(2-3)
55uHMin. , AT 100KHz 100mV, P(10-11)
3. DC RESISTANCE : 1.3Ω Max., P(11-14);(15-16),(17-20),(21-22),(23-2),(3-4),(9-10)Shorted
4. HI-POT : 4.5KVrms/2SEC./Leakage current 0.5mA Max., PRI. TO SEC.
1.5KVrms/2SEC./ Leakage current 0.5mA Max. , SEC. WINDING TO WINDING

DIMENSIONS · SCHEMATICS & CONSTRUCTION:

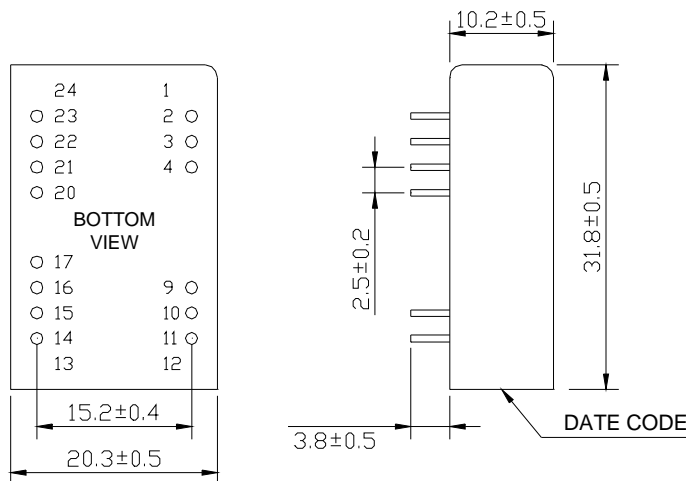

Unit:mm

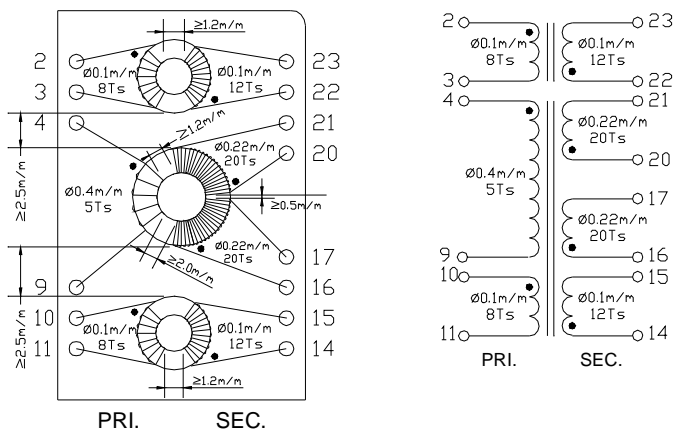

NOTE: Specifications are subject to change without prior notice.

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C