



DATA SHEET

UM MODEL NO.: UT90162-S	SPECIFICATION	REV.	
	DC/DC TRANSFORMER	A0	05/16

Electrical specification at 25°C:

- Turns Ratio & Polarity: 100:63±1%, at 15.75KHz 1V, PIN(5-6):(1-10)
100:32±1%, at 15.75KHz 1V, PIN(5-6):(8-3)
- Inductance: 1.07mH±25%, at 10KHz 50mV, PIN(1-10)
276uH±25%, at 10KHz 50mV, PIN(8-3)
2.70mH±25%, at 10KHz 50mV, PIN(5-6)
- D.C Resistance: 1.0Ω MAX. PIN(1-10)
0.5Ω MAX. PIN(8-3)
6.5Ω MAX. PIN(5-6)
- Hi-Pot test:
Up=1.0KVac/0.5mA/2sec.PIN(1-10) to (8-3); PIN(1-10) to (5-6)

Dimension & Schematic:

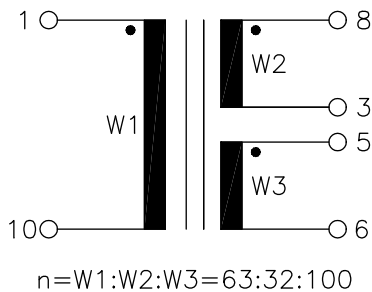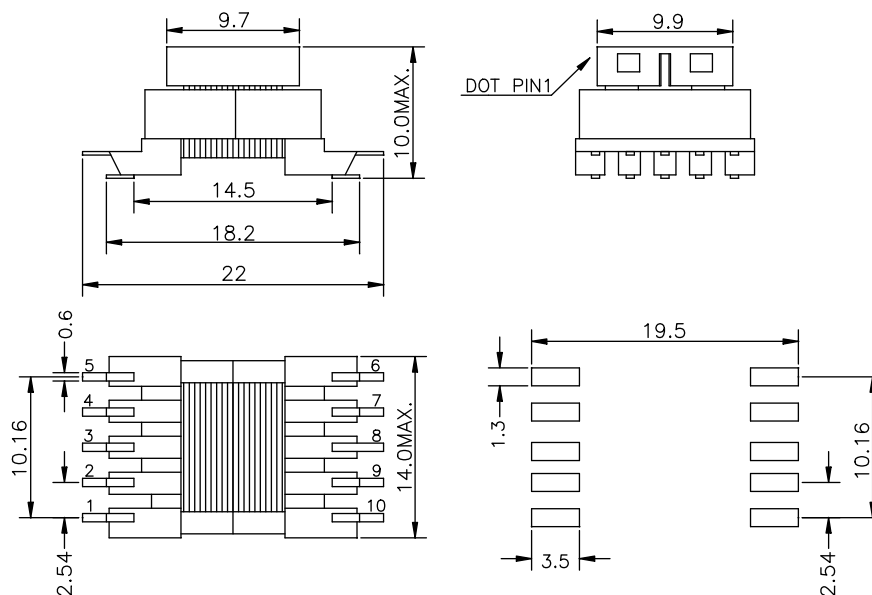

NOTE: 1. Packaging information-tape and reel according. "EF12.6B" of data sheet 01-00
2. Specifications are subject to change without prior notice. to item no

UNIT: mm

Tolerances: ±0.2mm

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
TAICHUNG,TAIWAN,R.O.C