


DATA SHEET

UM MODEL NO.:	SPECIFICATION	REV.	
UT90334	TRANSFORMER	A1	06/50


ELECTRICAL SPECIFICATIONS AT 25⁰C :

1. INDUCTANCE : 288.8 μ H MIN. AT 1KHz 250mV , PIN(4-6)
2. TURNS RATIO&PHASE : 1:1 \pm 2% At 15.75KHz 1V , PIN(4-6): (3-1)
3. D.C. Resistance : (1)1.7 Ω MAX. , PIN(4-6).
(2)2.1 Ω MAX. , PIN(3-1).
4. DIELECTRIC STRENGTH : (1)1700Vdc/ 0.5mA/ 2sec. , PIN4 to PIN3
(2)500Vdc/ 0.5mA/ 2sec. , ALL WINDINGS TO CORE.


DIMENSIONS & SCHEMATICS :




PIN5 CUT OFF




**pin pitch to 1. \pm 0.1mm

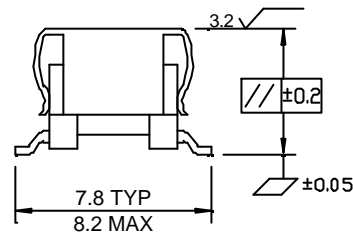

TOLERANCE: \pm 0.1mm



SUGGEST P.C.B. LAYOUT



- NOTE : 1. Packaging Information-Tape And Reel According To Item No. "EE5S01" Of Data Sheet 01-00
 2. For RoHS compliant products:
 a.) The UMEC ordering code: **TG-UT90334**
 b.) Date Code suffix to "G" (xxxxG).
 c.) Solder : Sn/Ag/Cu .
 3. Specifications are subject to change without prior notice.

UNIT : mm

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.
 TEL:886-4-23590096 FAX:886-4-23590129
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,
 TAICHUNG,TAIWAN,R.O.C