



# DATA SHEET

UM MODEL NO.:	SPECIFICATIONS	REV.	
UT21325V-TS	2-Fold Common Mode Choke	A0	06/02

Electrical Specifications at 25 °C:

1. Turns ratios: 1:1±1%, at 15.75KHz 1V PIN(1-2):(4-3)
2. Inductance: 20mH +50% /-30% , at 10KHz 10mV each winding
3. DC Resistance: 3.0Ω Max., each winding
4. Hi-Pot: 500Vac/2sec. Leakage current 0.5mA Max. Winding to Winding
5. In=0.07A

Dimensions & Schematics:

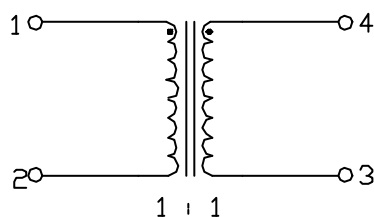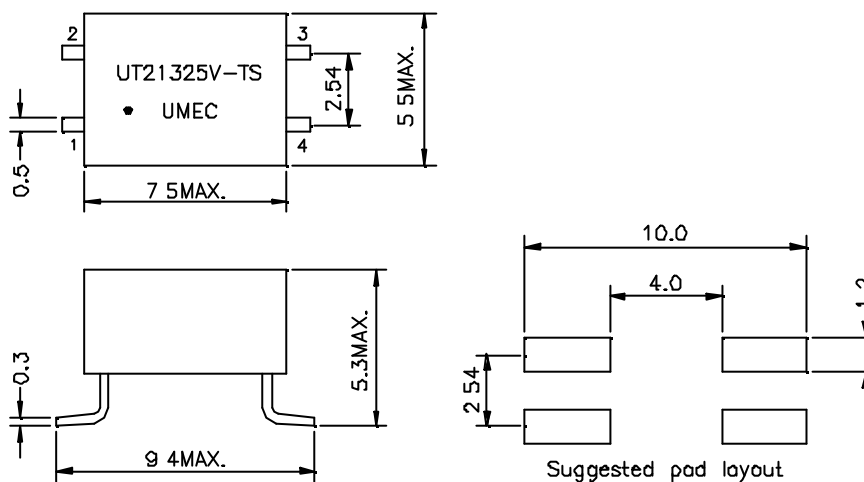

- NOTE :
1. Packaging Information: Tape and Reel according to Item NO. "K5SA" OF DATA SHEET 01-00"
  2. For RoHS compliant products:
    - a.) The UMEC ordering code: **TG-UT21325V-TS**
    - b.) Date Code suffix to "G" (xxxxG).
    - c.) Solder : Sn/Ag/Cu .
  3. Specifications are subject to change without prior notice.

Unit: mm

Tolerances: ±0.25mm

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
<http://www.umec-web.com> Email:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C