


# DATA SHEET

UM MODEL NO.:	SPECIFICATION	REV.	
UT64345	INDUCTORS	B3	01/11


## ELECTRICAL SPECIFICATION :

- 1). TURNS RATIO & PHASE : 76:26:33:44 , 15.75KHz , 1V ,  
PIN (1-2): (2-6): (6-5): (5-4).
- 2). INDUCTANCE : 1.44 mH±5% , 10KHz , 100mV , PIN (1-2).  
2.58 mH±5% , 10KHz , 100mV , PIN (1-6).  
4.52 mH±5% , 10KHz , 100mV , PIN (1-5).  
7.96 mH±5% , 10KHz , 100mV , PIN (1-4).  
1.296 mH Min , 10KHz , 100mV , 70mADC PIN (1-2).
- 3). DC RESISTANCE : 1.9-2.3Ω , PIN (1-2).  
2.65-3.25Ω , PIN (1-6).  
5.2-6.35Ω , PIN (1-5).  
8.5-10.7Ω , PIN (1-4).
- 4). HI-POT : 500VAC , 1SEC , 0.5mA , WINDING TO CORE.

## DIMENSIONS & SCHEMATICS :

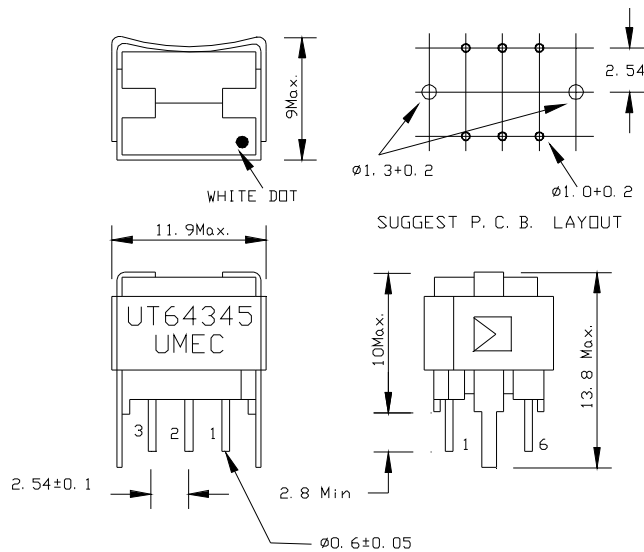

NOTE: WITHOUT VARNISH, THE CLAMP PIN POSITION IS KEEP UP FREE.

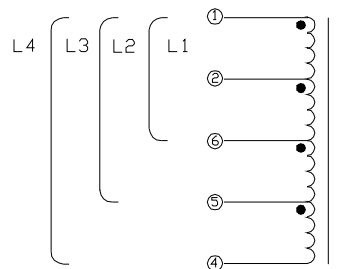

NOTE: Specifications are subject to change without prior notice.

