





# DATA SHEET

UM MODEL NO.:	SPECIFICATION	REV.	
UT90381	TRANSFORMER	A0	03/15

## ELECTRICAL SPECIFICATION AT 25 °C

- INDUCTANCE : 506uH±10% AT 10KHz , 50mV , PIN(6-1).
- D.C.Resistance : (1) 450mΩ MAX. , PIN(6-1).  
 (2) 500mΩ MAX. , PIN(1-2).  
 (3) 3.8Ω MAX. , PIN(3-4).  
 (4) 850mΩ MAX. , PIN(4-5).
- URNS RATIO & PHASE :  
 45 : 45 : 120 : 24 ±3% AT 15.75KHz , 1V , PIN(6-1) : (1-2) : (3-4) : (4-5).
- DIELECTRIC STRENGTH : (1)500Vrms/60Hz/0.5mA/2sec PIN6 TO PIN3.  
 (2)500Vrms/60Hz/0.5mA/2sec ALL WINDINGS TO CORE.

## DIMENSIONS & SCHEMATICS

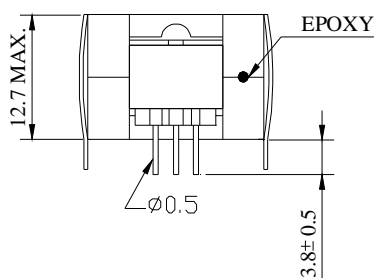

Note: Specifications are subject to change without prior notice.

UNIT : mm

E10-007-C



UNIVERSAL MICROELECTRONICS CO.,LTD.  
 TEL:886-4-23590096 FAX:886-4-23590129  
 http://www.umec-web.com E-mail:business@umec.com.tw

3,27TH RD.,TAICHUNG INDUSTRIAL PARK,  
 TAICHUNG,TAIWAN,R.O.C